


H-150 SAP L

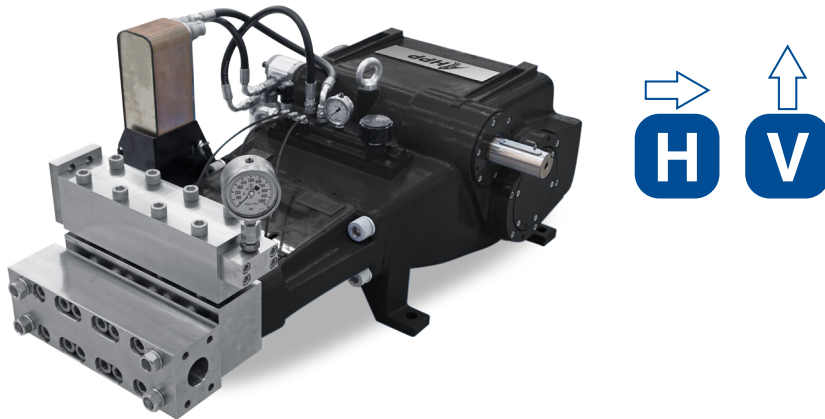

LEGEND

 With tungsten carbide plunger

 With forced lubrication

 Heat exchanger

 **V** Vertical assembling




 **H** Horizontal assembling

 H-150 SAP L   

														
Code	Code	Ø mm	rpm	gear ratio	rpm	l/min	USgpm	bar	psi	MPa	HP	kW	kg	lb
P231554V11400	P231554H11400	40	1500	2,9	517	155,9	41,2	400	5800	40	157,0	115,5	400	882
P231564V11400	P231564H11400		1800	3,6	502	151,2	39,9	400	5800	40	152,3	112,0	400	882
P231554V11450	P231554H11450	45	1500	2,9	517	197,3	52,1	320	4640	32	159,0	116,9	400	882
P231564V11450	P231564H11450		1800	3,6	502	191,4	50,6	320	4640	32	154,2	113,4	400	882
P231554V11500	P231554H11500	50	1500	2,9	517	243,6	64,4	260	3770	26	159,5	117,3	400	882
P231564V11500	P231564H11500		1800	3,6	502	236,3	62,4	260	3770	26	154,7	113,8	400	882
P231554V11550	P231554H11550	55	1500	2,9	517	294,8	77,9	215	3117,5	21,5	159,6	117,4	400	882
P231564V11550	P231564H11550		1800	3,6	502	285,9	75,5	215	3117,5	21,5	154,7	113,8	400	882
P231554V11620	P231554H11620	62	1500	2,9	517	374,6	99,0	170	2465	17	160,3	117,9	400	882
P231564V11620	P231564H11620		1800	3,6	502	363,3	96,0	170	2465	17	155,5	114,4	400	882

Performances refer to theoretical delivery with 100% volumetric efficiency. For continuous or heavy-duty use, contact our technical department.

DIMENSIONS

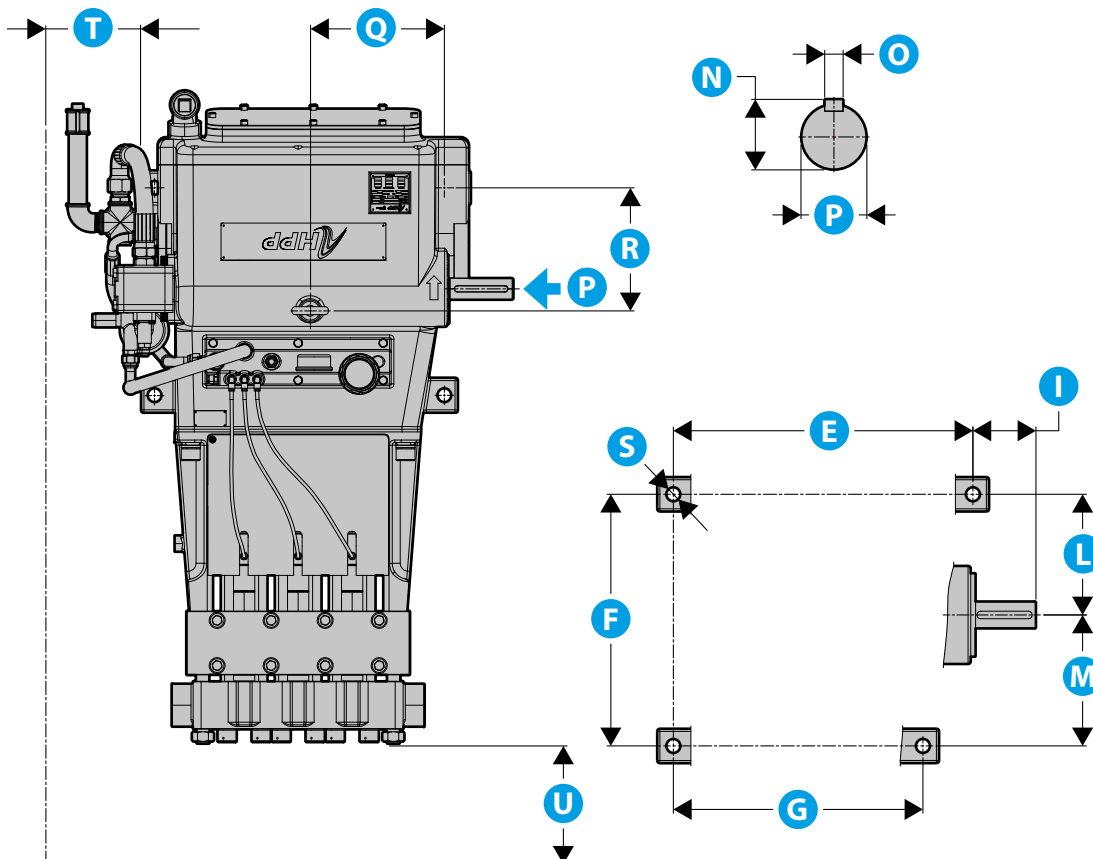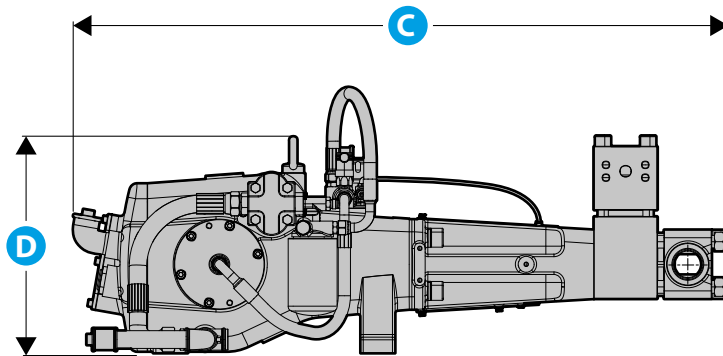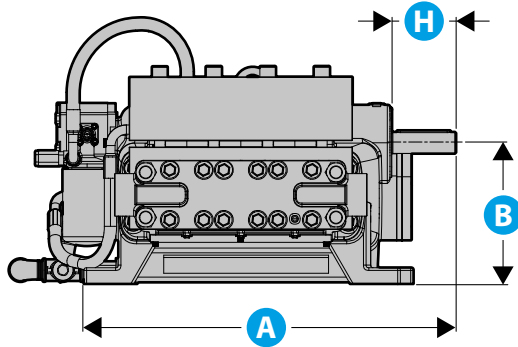


Pump Model		H-150 SAP L
A	mm	699,5
	(in)	(27,54)
B	mm	265
	(in)	(10,43)
C	mm	1038
	(in)	(40,86)
D	mm	407,5
	(in)	(16,04)
E	mm	565
	(in)	(22,24)
F	mm	390
	(in)	(15,35)
G	mm	546
	(in)	(21,50)
H	mm	120,5
	(in)	(4,74)
I	mm	110
	(in)	(4,33)
L	mm	190
	(in)	(7,48)
M	mm	200
	(in)	(7,87)
N	mm	43
	(in)	(1,69)
O	mm	12 (DIN 6885)
	(in)	(0,47)
P	mm	ø 40 +0,018 +0,002
	(in)	(ø 1,57)
Q	mm	272,5
	(in)	(10,73)
R	mm	231
	(in)	(9,09)
S	mm	ø 26 (ø 1,02)
	(in)	
T	mm	150
	(in)	(5,91)
U	mm	500
	(in)	(19,69)

PUMP ACCESSORIES

REGULATING VALVES



PNEUMATIC CONTROL VALVES



SAFETY VALVES



PRESSURE GAUGES




ACCESSORIES FOR WORK

DUMP SHUT GUNS / UNDERWATER GUNS /
PNEUMATIC GUNS



DUMP TYPE
FOOT VALVE




MULTI-JET

Multi-purpose surface.
Preparation system
for floors and hulls.
2800 bar (40K psi).



POWER BOX

3/2" Ultra High
Pressure control
valve to control the
gun's water flow
and/or operate with
a multi-gun system.



HIGH PRESSURE HOSES
ULTRA HIGH PRESSURE HOSES



FLEXIBLE LANCE NOZZLES
RIGID LANCE NOZZLES



HIGH PRESSURE
SWIVEL FOR HOSES



ROTATING
NOZZLES



PROTECTIVE CLOTHING
FOR WATERJETTING (TST)



FLEXIBLE LANCES / RIGID LANCES



"TURBO" NOZZLES





Distributed by: / Distribuito da:

P.T.C. Srl › via Mantegna, 4 - 42048 Rubiera (RE) - Italy

Phone: +39 0522/1932911 › Fax: +39 0522/1932922

mail: info@ptcitaliana.com › website: www.ptcitaliana.com
